

Wireshark- OSI- Physical & Data-link Layers

BAT-221: BAS Networking



This material is based upon work supported by the National Science Foundation Advanced Technical Education grant program, A New Technician Training Program for Advanced Building Technologies, DUE-2000190.

The opinions, findings, and conclusions or recommendations expressed are those of the author(s) and do not necessarily reflect the views of the National Science Foundation.

Name: _____

Section: _____

Wireshark- OSI- Physical & Data-link Layers

SYNOPSIS

In this lab, we are going to use Wireshark to analyze the two lowest layers of the OSI model: Physical and Data-link layer.

OBJECTIVES

Upon completion of this activity the student will be able to:

- Capture and analyze network traffic using Wireshark.
- Analyze the OSI Physical layer in Wireshark.
- Understand the fields that make up a frame in the OSI Data-link layer.
- Analyze the OSI Data-link layer in Wireshark.

PARTS AND EQUIPMENT

- Networked laptop

SOFTWARE

- [Wireshark](https://www.wireshark.org/) [https://www.wireshark.org/]

REFERENCES

- [What is a MAC Address: How to Find and Identify](https://whatismyipaddress.com/mac-address) [https://whatismyipaddress.com/mac-address]
- [OSI Model](http://www.practicalnetworking.net/series/packet-traveling/osi-model/) [http://www.practicalnetworking.net/series/packet-traveling/osi-model/]
- [What is the Internet Control Message Protocol \(ICMP\)?](https://www.fortinet.com/resources/cyberglossary/internet-control-message-protocol-icmp) [https://www.fortinet.com/resources/cyberglossary/internet-control-message-protocol-icmp]

MANUALS

- [Network Communications for Buildings](https://www.ccontrols.com/pdf/NCB2015.pdf) [https://www.ccontrols.com/pdf/NCB2015.pdf]

BACKGROUND

The MAC address is a 48-bit (6 byte) network address. The MAC address is used to uniquely identify devices on a network.

A MAC address is hardcoded onto the network adaptor by the manufacturer. The manufacturer makes sure the address is unique.

The MAC address will appear be written using hexadecimal numbers and will usually appear in the following formats:

- A0-51-0B-29-C9-4E
- A0:51:0B:29:C9:4E

The MAC address is used for source and destination address at the Data-link layer.

PROCEDURES


Part 1: Network configuration

We need to get the IPv4 address and MAC address of the network adaptor that we are going to be capturing traffic on.

1.1 - Laptop configuration

An ipconfig will give us the IPv4 address but we also want to know the MAC address on the network adaptor, so we are going to run it without the /all switch.

Run an “ipconfig /all” to get the IPv4 address and the MAC address:

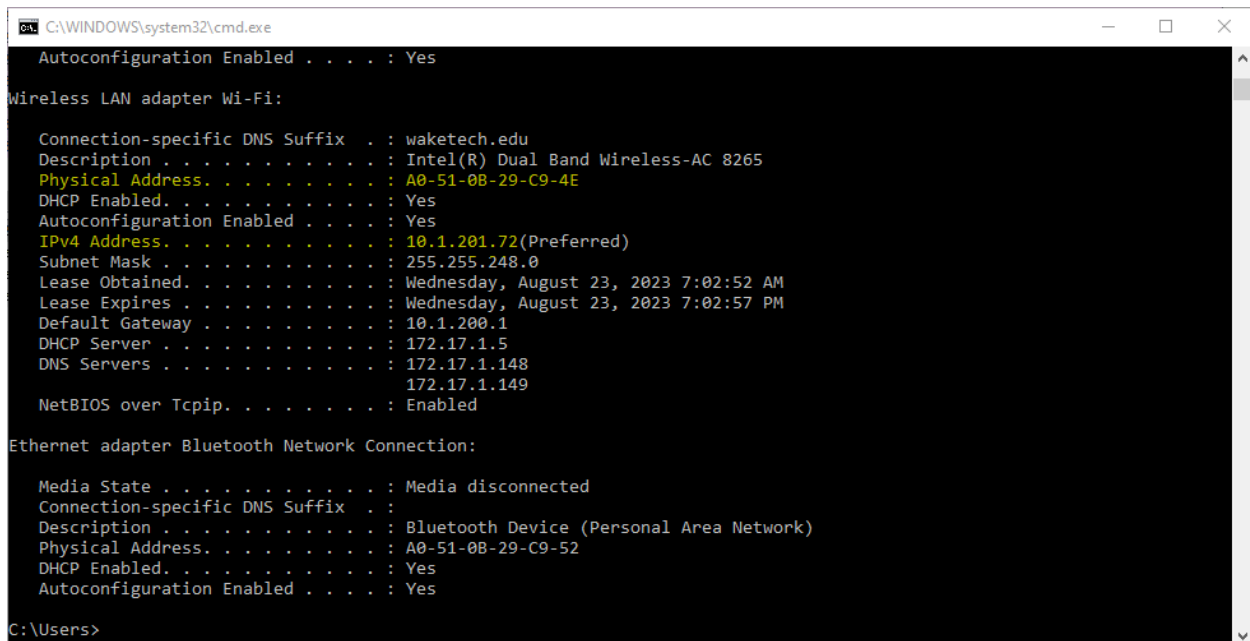

```
C:\WINDOWS\system32\cmd.exe
Autoconfiguration Enabled . . . . : Yes

Wireless LAN adapter Wi-Fi:

    Connection-specific DNS Suffix  . : waketch.edu
    Description . . . . . : Intel(R) Dual Band Wireless-AC 8265
    Physical Address. . . . . : A0-51-0B-29-C9-4E
    DHCP Enabled. . . . . : Yes
    Autoconfiguration Enabled . . . . : Yes
    IPv4 Address. . . . . : 10.1.201.72(Preferred)
    Subnet Mask . . . . . : 255.255.248.0
    Lease Obtained. . . . . : Wednesday, August 23, 2023 7:02:52 AM
    Lease Expires . . . . . : Wednesday, August 23, 2023 7:02:57 PM
    Default Gateway . . . . . : 10.1.200.1
    DHCP Server . . . . . : 172.17.1.5
    DNS Servers . . . . . : 172.17.1.148
                           172.17.1.149
    NetBIOS over Tcpip. . . . . : Enabled

Ethernet adapter Bluetooth Network Connection:

    Media State . . . . . : Media disconnected
    Connection-specific DNS Suffix  . :
    Description . . . . . : Bluetooth Device (Personal Area Network)
    Physical Address. . . . . : A0-51-0B-29-C9-52
    DHCP Enabled. . . . . : Yes
    Autoconfiguration Enabled . . . . : Yes

C:\Users>
```

What is the MAC (Physical) address of our network interface? _____

What is the IPv4 address of our network interface? _____

What is the IPv4 address of the Default Gateway? _____

1.2 - Default gateway

To reach outside our LAN, we go through the Default Gateway. While we have the IPv4 address of the Default Gateway, we need to get the MAC address of Default Gateway. We have already gotten the IPv4 address of the Default Gateway from our network interface.


ARP

ARP is a protocol that maps an IP address to a MAC (Physical) address.

We can use the dos “arp” command to get the translation between the two.

Run the arp command with the -a switch with the IPv4 address of the Default Gateway.

What is the IPv4 address of the Default Gateway from our network interface?_____

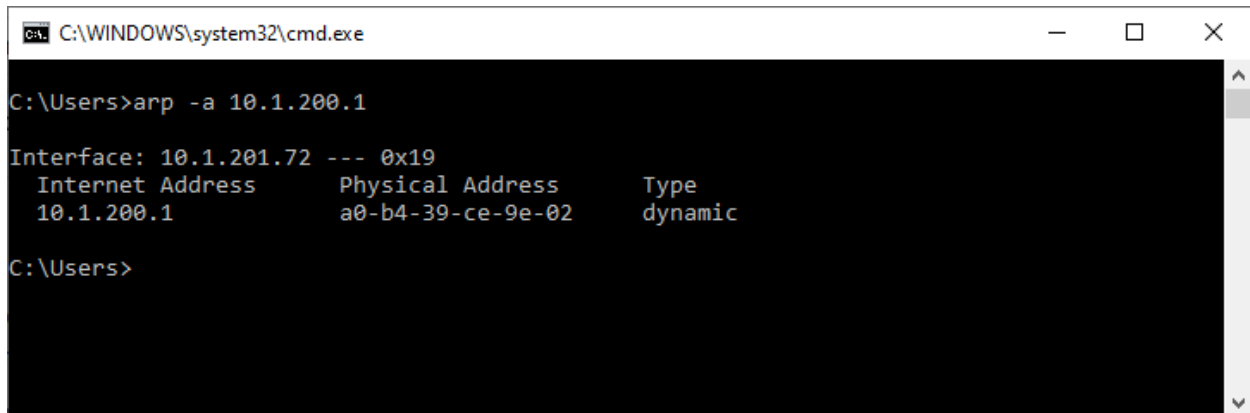

```
C:\WINDOWS\system32\cmd.exe

C:\Users>arp -a 10.1.200.1

Interface: 10.1.201.72 --- 0x19
Internet Address      Physical Address      Type
10.1.200.1           a0-b4-39-ce-9e-02    dynamic

C:\Users>
```

What is the MAC address of the Default Gateway?_____

1.3 - Summarize

Summarize the MAC and IPv4 address for our interface network as well as the Default Gateway.

Network Interface MAC address?_____

Network Interface IPv4 address?_____

Default Gateway MAC address?_____

Default Gateway IPv4 address?_____

Part 2: Wireshark

2.1 - Wireshark Capture

Start Wireshark and it should start capturing network traffic once you have selected the network interface.

Wireshark interface showing a live capture of network traffic on a Wi-Fi interface. The packet list displays the following traffic:

No.	Time	Delta	Source	Destination	Protocol	Length	Info
120	07:36:19.042916	0.204028	10.1.201.67	239.255.255.250	SSDP	179	M-SEARCH * HTTP/1.1
121	07:36:19.145747	0.102831	10.1.175.46	224.0.0.251	MDNS	254	Standard query response
122	07:36:19.676508	0.530761	10.1.201.72	23.62.32.5	TCP	55	[TCP Keep-Alive] 63844 →
123	07:36:19.676895	0.000387	10.1.201.72	44.236.123.131	TCP	567	63067 → 1514 [PSH, ACK]
124	07:36:19.688488	0.011593	23.62.32.5	10.1.201.72	TCP	66	[TCP Keep-Alive ACK] 443
125	07:36:19.761408	0.072920	10.1.201.105	224.0.0.251	MDNS	81	Standard query 0x0000 AN
126	07:36:19.761408	0.000000	10.1.201.105	224.0.0.251	MDNS	119	Standard query response
127	07:36:19.761408	0.000000	10.1.201.105	224.0.0.252	LLMNR	75	Standard query 0xa973 AN
128	07:36:19.761408	0.000000	10.1.201.105	10.1.207.255	NBNS	110	Registration NB SWM-ENG-
129	07:36:19.761408	0.000000	10.1.201.105	10.1.207.255	NBNS	110	Registration NB WORKGROU
130	07:36:19.761408	0.000000	10.1.201.31	239.255.255.250	SSDP	216	M-SEARCH * HTTP/1.1
131	07:36:19.761408	0.000000	10.1.201.105	10.1.207.255	NBNS	110	Registration NB SWM-ENG-
132	07:36:19.843685	0.082277	44.236.123.131	10.1.201.72	TCP	56	1514 → 63067 [ACK] Seq=1

The packet details pane for Frame 1 shows the following structure:

- Frame 1: 100 bytes on wire (800 bits), 100 bytes captured (800 bits) on interface 0
- Ethernet II, Src: Cisco_ce:9e:02 (a0:b4:39:ce:9e:02), Dst: 01:00:0c:00:00:00
- Internet Protocol Version 4, Src: 52.114.133.205, Dst: 239.255.255.250
- Transmission Control Protocol, Src Port: 443, Dst Port: 63067
- Transport Layer Security


The packet bytes pane shows the raw hex and ASCII data for the captured frame.

2.2 - Ping traffic

The network frames that we are going to be examining are ICMP packets. We are going to generate ICMP requests by using the dos “ping” command.

The dos “ping” command by default generates four ICMP requests.

Open a command prompt window and ping www.waketech.edu.

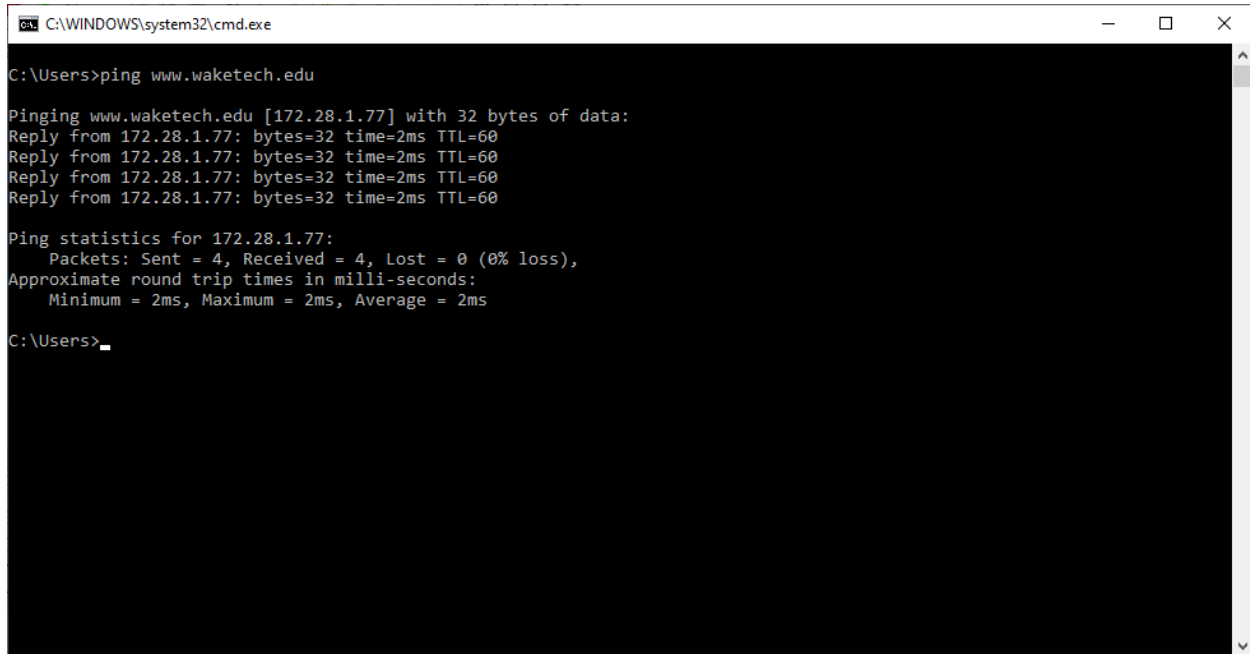

```
C:\WINDOWS\system32\cmd.exe

C:\Users>ping www.waketech.edu

Pinging www.waketech.edu [172.28.1.77] with 32 bytes of data:
Reply from 172.28.1.77: bytes=32 time=2ms TTL=60
Reply from 172.28.1.77: bytes=32 time=2ms TTL=60
Reply from 172.28.1.77: bytes=32 time=2ms TTL=60
Reply from 172.28.1.77: bytes=32 time=2ms TTL=60

Ping statistics for 172.28.1.77:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 2ms, Average = 2ms


C:\Users>
```

2.3 - Stop Capture

Wireshark should have captured the network traffic that we want to examine. There is no need for Wireshark to continue to capture packets.

You can stop capturing network traffic by one of the following ways:


1. Toolbar: Click “Stop capturing packets” icon
2. Menu: Capture → Stop
3. Shortcut: CTRL+E

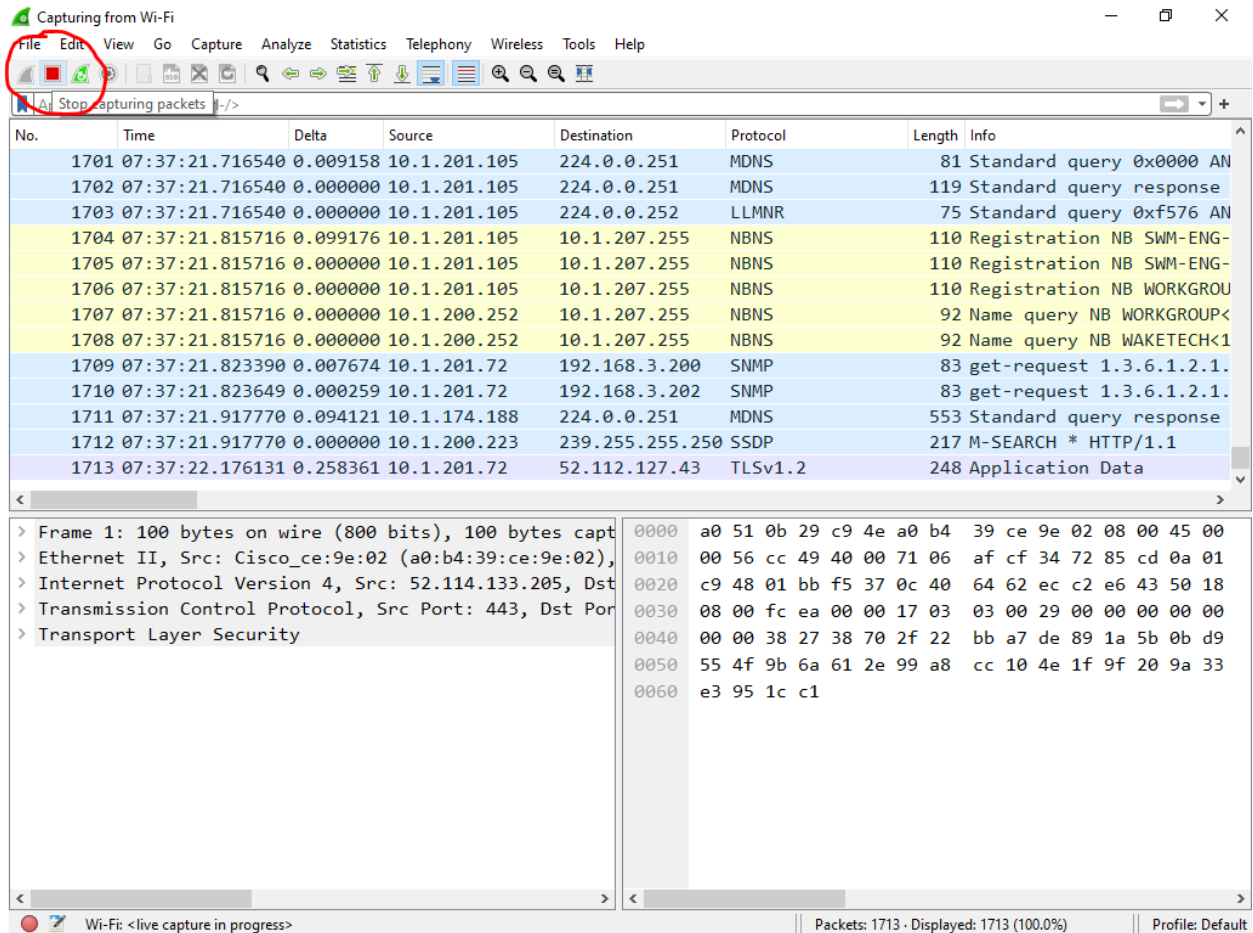

2.4 - Filter ICMP requests

Even though we were only capturing network traffic for a small period of time, Wireshark would have captured hundreds if not thousands of packets. We want to limit packets to just show the ICMP requests and replies.

1. In the filter window type “ICMP” and hit Enter.

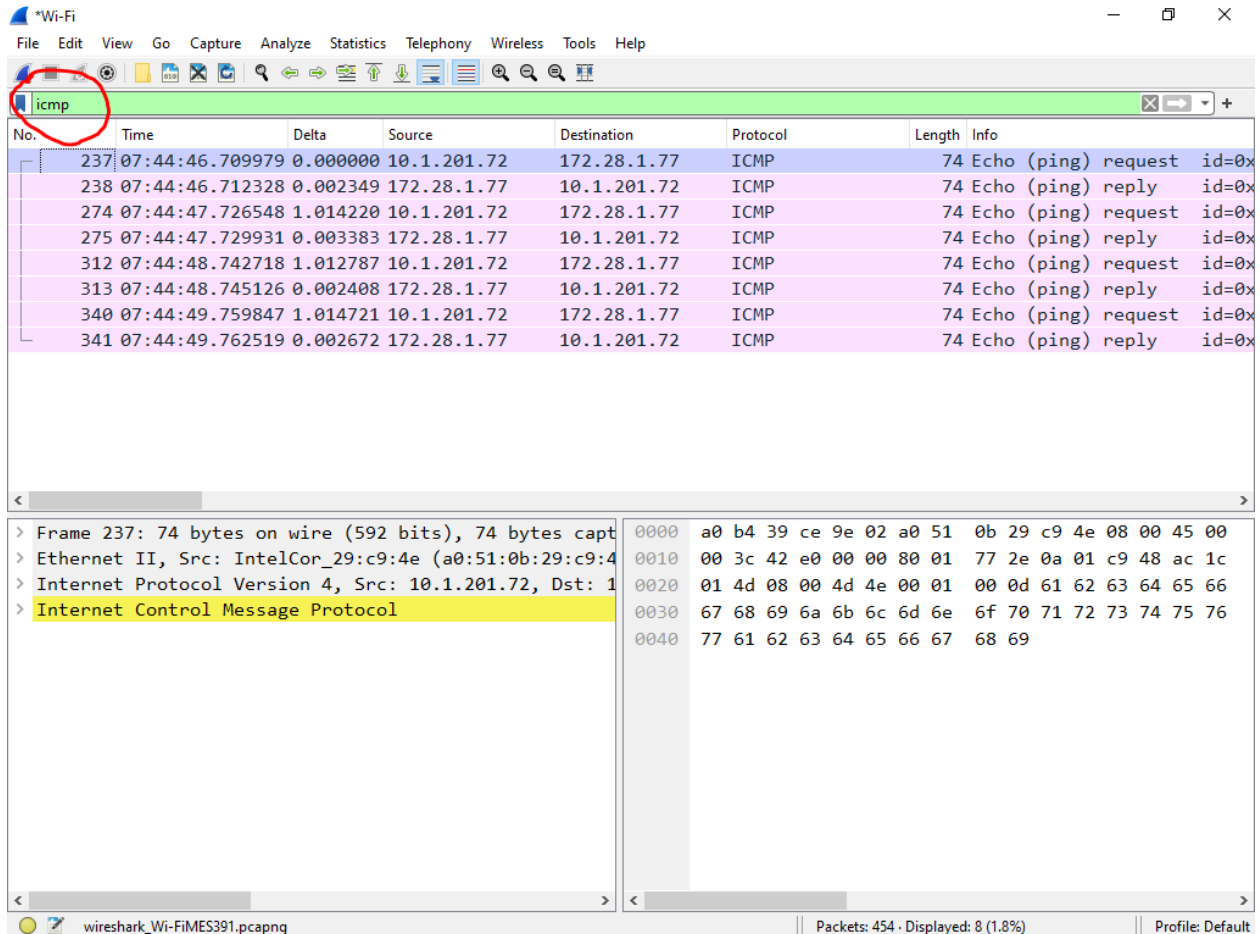

You should see 8 packets in the Packet List pane. The 8 packets represent the 4 ICMP requests and a reply back for each request.


2.5 - Wireshark Configuration

We want to see the Packet Diagram in our view, so we need to set some preferences. The Packet Diagram shows a physical layout of the packet and makes looking at the frames easier.


Open the preferences by one of the following means:

- Menu: Edit → Preferences...
- Shortcut: Ctrl+Shift+P

We want to change the layout of the Wireshark panes and we want to see the Packet Diagram in Pane 3. Make sure to save your preferences.

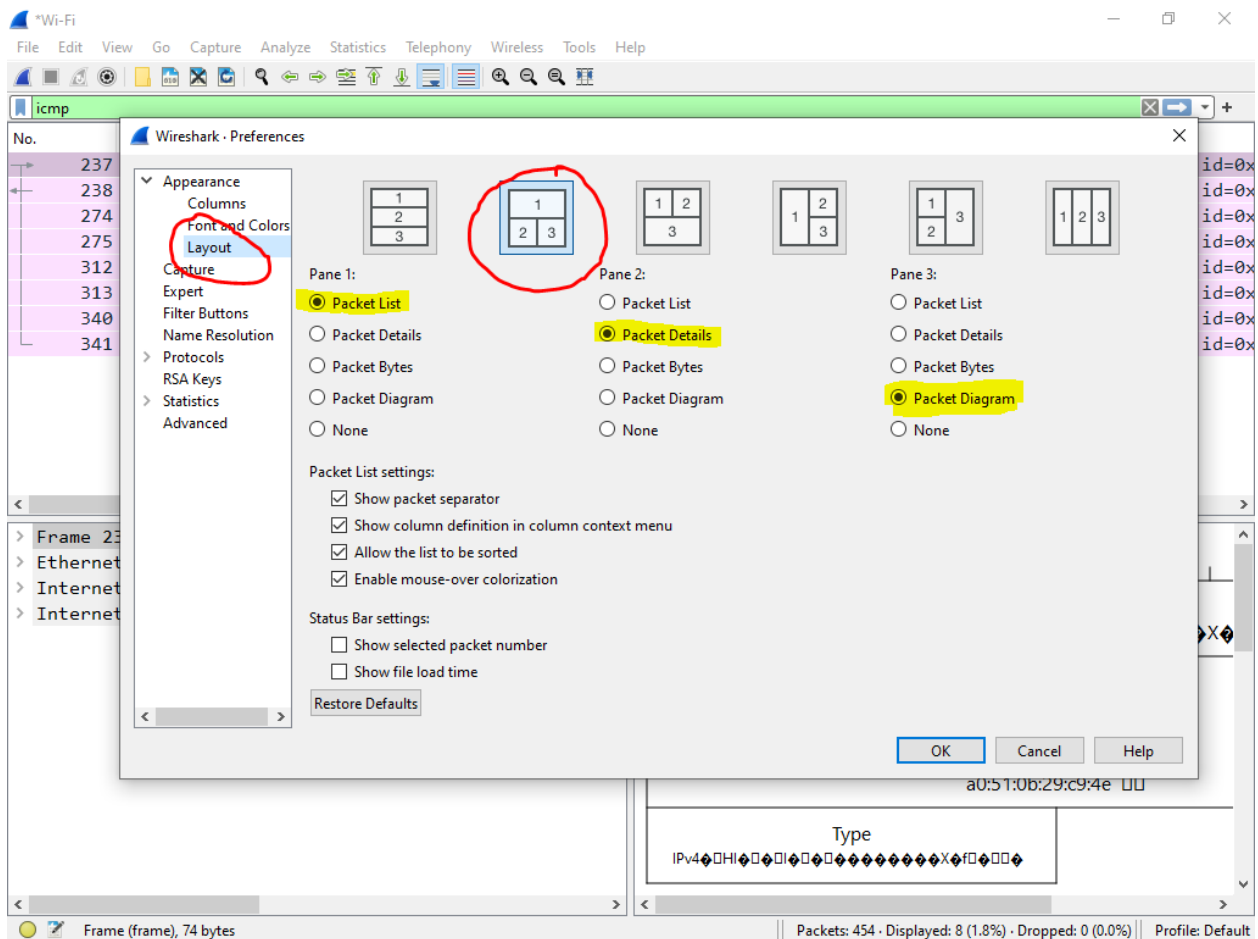

Your screen should look like this now:

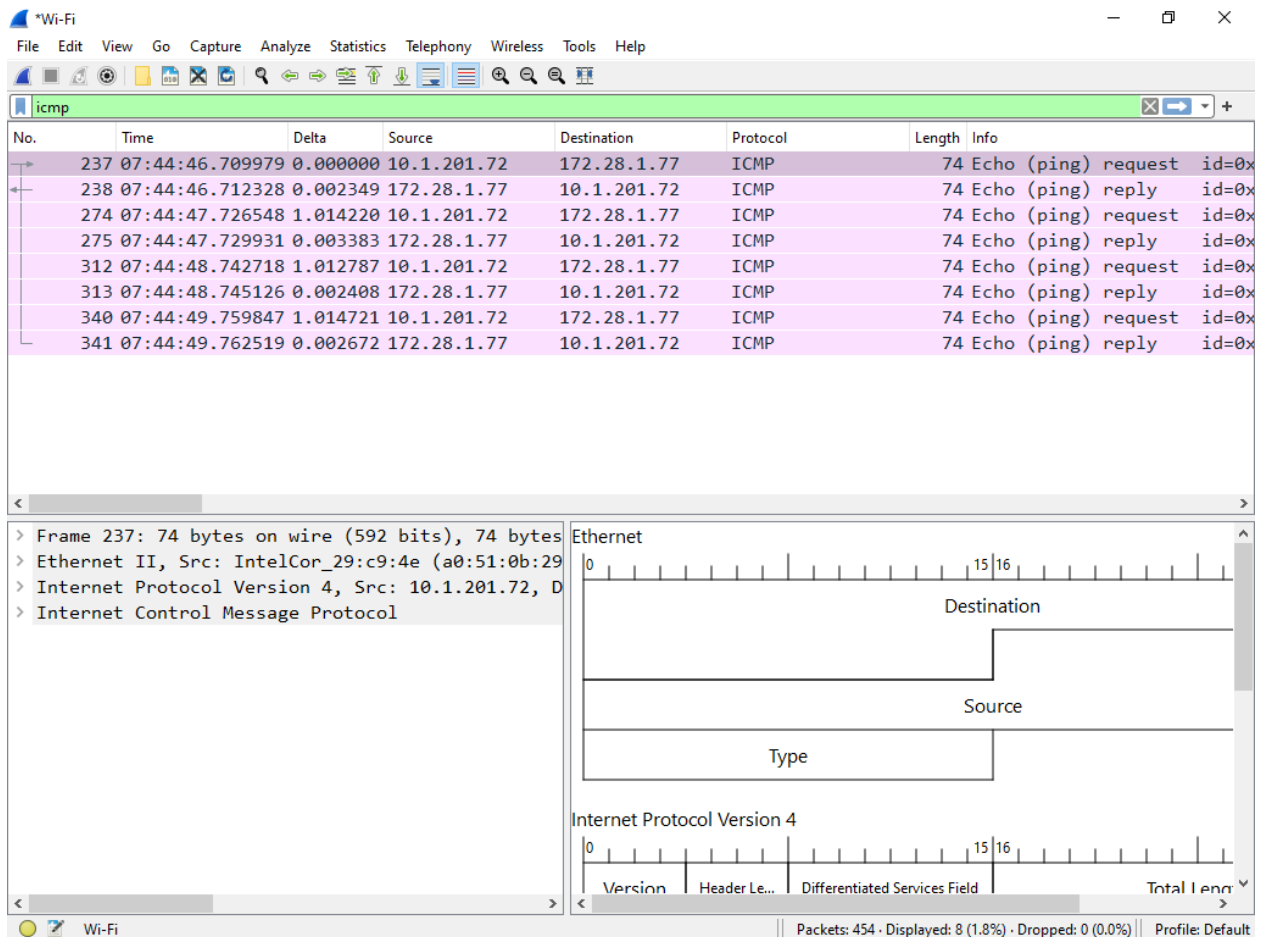

Packet List

The top pane is the Packet List and shows all the packets that have been filtered. If you select a packet, then the panes below change to show that packet's information.

Packet Details

The bottom left pane is the Packet Details and shows the OSI model of the packet selected in the Packet List.

You can expand each level in the Packet Details to see more information.

Packet Diagram

The bottom right pane is the Packet Diagram and shows the frame in a physical diagram that makes looking at the data easier. It shows the packet selected in the Packet List.

Right-click the Packet Diagram and Select "Show Field Values" so the field values will be shown in the Packet Diagram pane.

Part 3: OSI – Physical layer

The Physical layer is the first layer of the OSI Model. It includes anything physically needed to send data from one location to another.

There are many possible mediums for the data to travel over and some examples are:

- Category cable
- Fiber
- Wireless

The network adapters of the Physical layer handles encoding the data into a format necessary to transfer the data based upon the medium. For Category cable, the data is encoded and transferred using voltages while fiber would utilize light. Radio waves are part of the Physical layer for Wireless.

The Physical layer includes but is not limited to:

- Network adaptors
- Medium
 - Copper and voltages for Category cables
 - Antennas and radio waves for Wi-Fi
- Hardware

Are the network adaptors considered part of the Physical layer? _____

For Category cables, how is the data represented over the wire? _____

Are radio waves considered part of the Physical layer? _____

If we are discussing speech from one person to another, name three items that would be considered part of the Physical layer? _____

Part 4: Wireshark – Physical layer

We are going to examine the Physical layer in Wireshark.

Select the first packet in the Packet List. The first item in the Packet Details window represents the Physical layer of the OSI model.

Expand the Physical layer.

The screenshot shows the Wireshark interface with a packet capture of ICMP Echo (ping) requests. The Packet List pane shows several packets, with packet 237 selected. The Packet Details pane shows the structure of the selected packet, which is an Ethernet II frame containing an Internet Protocol Version 4 (IPv4) header and an Internet Control Message Protocol (ICMP) Echo (ping) request.

Packet List:

No.	Time	Delta	Source	Destination	Protocol	Length	Info
237	07:44:46.709979	0.000000	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
238	07:44:46.712328	0.002349	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s
274	07:44:47.726548	1.014220	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
275	07:44:47.729931	0.003383	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s
312	07:44:48.742718	1.012787	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
313	07:44:48.745126	0.002408	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s
340	07:44:49.759847	1.014721	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
341	07:44:49.762519	0.002672	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s

Packet Details:

- Frame 237: 74 bytes on wire (592 bits), 74 bytes captured on interface 0 (Device\NPF_{F137E075-D30C-450F-B...})
- Section number: 1
- Interface id: 0 (Device\NPF_{F137E075-D30C-450F-B...})
- Encapsulation type: Ethernet (1)
- Arrival Time: Aug 23, 2023 07:44:46.709979000 East
- [Time shift for this packet: 0.000000000 seconds]
- Epoch Time: 1692791086.709979000 seconds
- [Time delta from previous captured frame: 0.148969 seconds]
- [Time delta from previous displayed frame: 0.000000 seconds]
- [Time since reference or first frame: 6.604997000 seconds]
- Frame Number: 237
- Frame Length: 74 bytes (592 bits)
- Capture Length: 74 bytes (592 bits)
- [Frame is marked: False]
- [Frame is ignored: False]
- [Protocols in frame: eth:ethertype:ip:icmp:data]
- [Coloring Rule Name: ICMP]
- [Coloring Rule String: icmp || icmpv6]
- Ethernet II, Src: IntelCor_29:c9:4e (a0:51:0b:29:c9:4e), Dst: 10.1.201.72
- Internet Protocol Version 4, Src: 10.1.201.72, Dst: 172.28.1.77
- Internet Control Message Protocol

Packet Diagrams:

- Ethernet:** Destination: a0:b4:39:ce:9e:02, Source: a0:51:0b:29:c9:4e, Type: IPv4
- Internet Protocol Version 4:** Version: 4, Header Len: 20, Differentiated Services Field: 0x0000, Total Length: 60, Identification: 0x42e0 (17120), Flags: 0x0000, Fragment Offset: 0, Time to Live: 128, Protocol: ICMP, Header Checksum: 0x772e00



The Packet Diagrams pane is the bottom right pane. The Physical layer is not represented in the Packet Diagram pane and the top entry here represents the Data-link layer.

How many bytes are in this frame? _____

How many bits are in this frame? _____

There are 8 bits per byte. Does the number of bytes correspond to the number of bits in this frame? _____

What date & time did this frame arrive at? _____

Expand the “Interface id” and what is the Interface description? _____

Does the interface description match the network connection listed in “ncpa.cpl” that you are capturing traffic on for Wireshark? _____

In the Physical layer, do you see a MAC address field or an IPv4 address field? _____

In the Physical layer, why do you see or not see a MAC address field or an IPv4 address field? _____

Part 5: OSI – Data Link layer

The Data-Link layer is the second layer in the OSI model. The Data-link layer is responsible for the node-to-node delivery. It delivers the data from a source node to the destination node and just moves data to the next hop.

The addressing for the Data-link layer is the MAC (media access control) or Physical address. While we may refer to devices by their IP address, the network utilizes the MAC address for its addressing at this layer.

The Data-link layer can only transmit to a node in the same LAN.

5.1 - MAC address

What is MAC an abbreviation for? _____

Is the MAC address the same as the Physical address? _____

How many bytes is a MAC address? _____

5.2 - Ethernet II DIX frame



Answer the questions in this Part with help from the Network Communications for Buildings manual.

Using the manual, look at the Ethernet Frames section under Shared Ethernet to answer the following questions.

Ethernet II fields

Looking at the Ethernet II DIX Frame, answer the following questions:

What field is the first 64 bits (8 bytes)? _____

What field is the next 48 bits (6 bytes)? _____

What field is the next 48 bits (6 bytes)? _____

What field is the next 16 bits (2 bytes)? _____

What field is the next field?_____

What field exists after the Data field?_____

Preamble field

When calculating the size of the frame is the Preamble field considered part of the Ethernet frame?_____

Destination field

Is the Destination field a MAC address or IPv4 address?_____

How many bits is the Destination field?_____

What is the purpose of the Destination field?_____

Does the Destination field represent the next hop or the final destination?_____

Is the Destination field a node in the same LAN?_____

Source field

Is the Source field a MAC address or IPv4 address?_____

How many bits is the Source field?_____

What is the purpose of the Source?_____

Data Type field

Does the Data-link layer guarantee delivery of data?_____

If delivery of data is guaranteed who would do that?_____

What is the purpose of the Type field?_____

Data field

What is the minimum size of the Data field?_____

What is the maximum size of the Data field?_____

What is a runt packet?_____

Frame Check Sequence field

The Frame Check Sequence is sometimes abbreviated to FCS.

What is the purpose of the FRC field? _____

How does the destination node utilize the FRC field? _____

What is considered a successful transmission according to the FRC field? _____

At this layer, if the destination calculates the FRC and the calculated FRC does not match the FRC field sent in the frame, is the source node informed? _____

Part 6: Wireshark – Data-link layer – ICMP request

We are going to look at an Ethernet frame in Wireshark.

Close the expanded Physical layer in the Packet Details pane to hide the Physical layer details.

The second item in the Packet Details represents the second layer of the OSI model. Expand the second item in the Packet Details list to show the frame in the Packet Diagram pane.

6.1 - ICMP request

Make sure you are still looking at the first packet in the Packet List as this is an ICMP request. In an ICMP request, your laptop is sending a request to www.waketech.edu. With the request, your laptop is the source.

The Data-link layer just handles node-to-node traffic.

For any traffic to travel outside your LAN, the traffic will go through the Default Gateway, so the Default Gateway is where this ICMP request is going to. While there are many more hops before the packet gets to the final destination; we are only capturing the traffic to and from our network interface. With the ICMP request, the Default Gateway is the destination because the final destination is outside our LAN.

Destination field

Click on the Destination field in the Packet Details and you should see the Destination field will be highlighted in the Packet Diagram in the right pane.

The screenshot shows the Wireshark interface with a packet capture of ICMP Echo requests and replies. The packet list on the left shows several packets, with packet 237 selected. The packet details pane on the left shows the hierarchy: Ethernet II, Internet Protocol Version 4, and Internet Control Message Protocol. The packet diagram on the right shows the structure of the Ethernet frame and the IPv4 packet. The Destination field in the Ethernet frame is highlighted in blue, showing the MAC address a0:b4:39:ce:9e:02. The Source field shows the MAC address a0:51:0b:29:c9:4e. The IPv4 packet details show the Version, Header Length, Differentiated Services Field, Total Length, Identification, Flags, Fragment Offset, Time to Live, Protocol, and Header Checksum.

No.	Time	Delta	Source	Destination	Protocol	Length	Info
237	07:44:46.709979	0.000000	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
238	07:44:46.712328	0.002349	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s
274	07:44:47.726548	1.014220	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
275	07:44:47.729931	0.003383	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s
312	07:44:48.742718	1.012787	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
313	07:44:48.745126	0.002408	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s
340	07:44:49.759847	1.014721	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
341	07:44:49.762519	0.002672	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s

Frame 237: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface 0
 Ethernet II, Src: IntelCor_29:c9:4e (a0:51:0b:29:c9:4e), Dst: Destination: Cisco_ce:9e:02 (a0:b4:39:ce:9e:02)
 Source: IntelCor_29:c9:4e (a0:51:0b:29:c9:4e)
 Type: IPv4 (0x0800)
 Internet Protocol Version 4, Src: 10.1.201.72, Dst: 172.28.1.77
 Internet Control Message Protocol

Ethernet
 Destination: a0:b4:39:ce:9e:02 (Cisco_ce:9e:02)
 Source: a0:51:0b:29:c9:4e (IntelCor_29:c9:4e)
 Type: IPv4 (0x0800)

Internet Protocol Version 4
 Version: 4
 Header Length: 20
 Differentiated Services Field: 0x0000
 Total Length: 60
 Identification: 0x42e0 (17120)
 Flags: 0x0000
 Fragment Offset: 0
 Time to Live: 128
 Protocol: ICMP
 Header Checksum: 0x772e

What is the Destination (MAC address only) of the Ethernet frame? _____

What is the MAC address of your Default Gateway? _____

Is the Destination of the Ethernet frame the same as the Default Gateway? _____

➤ If you answered No, troubleshoot the issue.

The Destination field is how many bytes? _____

The Destination address of the Ethernet frame should match the MAC address of the Default Gateway.

Source field

Click on the Source field in the Packet Details and you should see the Source field will be highlighted in the Packet Diagram in the right pane.

The screenshot shows the Wireshark interface with a packet capture of ICMP Echo (ping) requests. The packet list on the left shows several packets, with packet 237 selected. The packet details pane on the right shows the structure of the selected packet, which is an Ethernet II frame containing an IPv4 packet and an ICMP Echo (ping) request. The Source field in the Ethernet II section is highlighted in blue, indicating it is the selected field. The packet diagram on the right shows the layout of the packet, with the Source field highlighted in blue.

No.	Time	Delta	Source	Destination	Protocol	Length	Info
237	07:44:46.709979	0.000000	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
238	07:44:46.712328	0.002349	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s
274	07:44:47.726548	1.014220	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
275	07:44:47.729931	0.003383	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s
312	07:44:48.742718	1.012787	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
313	07:44:48.745126	0.002408	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s
340	07:44:49.759847	1.014721	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
341	07:44:49.762519	0.002672	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s

Frame 237: 74 bytes on wire (592 bits), 74 bytes captured (592 bits) on interface 0
 Ethernet II, Src: IntelCor_29:c9:4e (a0:51:0b:29:c9:4e), Dst: Cisco_ce:9e:02 (a0:b4:39:ce:9e:02)
 Source: IntelCor_29:c9:4e (a0:51:0b:29:c9:4e)
 Type: IPv4 (0x0800)
 Internet Protocol Version 4, Src: 10.1.201.72, Dst: 172.28.1.77
 Internet Control Message Protocol

Ethernet II, Src: IntelCor_29:c9:4e (a0:51:0b:29:c9:4e), Dst: Cisco_ce:9e:02 (a0:b4:39:ce:9e:02)
 Destination: Cisco_ce:9e:02 (a0:b4:39:ce:9e:02)
 Source: IntelCor_29:c9:4e (a0:51:0b:29:c9:4e)
 Type: IPv4 (0x0800)

Internet Protocol Version 4
 Version: 4
 Header Length: 20
 Differentiated Services Field: 0x0000
 Total Length: 60
 Identification: 0x42e0 (17120)
 Flags: 0x0000
 Fragment Offset: 0
 Time to Live: 128
 Protocol: ICMP
 Header Checksum: 0x772e
 Source Address: 10.1.201.72
 Destination Address: 172.28.1.77

What is the Source (MAC address only) of the Ethernet frame? _____

What is MAC address of your network interface from Part 1? _____

Is the Source of the Ethernet frame the same as your network interface? _____

➤ If you answered No, troubleshoot the issue.

The Source field is how many bytes? _____

The Source address of the Ethernet frame should match the MAC address of your network interface. This shows that your network interface is sending the data.

Type field

What is the Type field of the Ethernet frame? _____

Preamble field

Do you see the Preamble field? _____

Why do you see or not see the Preamble field? _____

FCS field

Do you see the FCS field? _____

Why do you see or not see the FCS field? _____

IP Address

In the Data-link layer, is the IPv4 address referenced? _____

In the Data-link layer, why do you see or not see an IPv4 address? _____

Part 7: Wireshark – Data-link layer – ICMP reply

7.1 - ICMP reply

Select the second packet in the Packet List pane is the reply to the first packet which was a request.

We want to look at the ICMP reply which is the response to our request. Now this implies the packet is going to our laptop. With the ICMP request, our network interface was the source; however, with the ICMP reply out network interface is the destination.

Destination field

Click on the Destination field in the Packet Details.

The screenshot shows the Wireshark interface with the following details:

- Packet List:**

No.	Time	Delta	Source	Destination	Protocol	Length	Info
237	07:44:46.709979	0.000000	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
238	07:44:46.712328	0.002349	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s
274	07:44:47.726548	1.014220	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
275	07:44:47.729931	0.003383	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s
312	07:44:48.742718	1.012787	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
313	07:44:48.745126	0.002408	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s
340	07:44:49.759847	1.014721	10.1.201.72	172.28.1.77	ICMP	74	Echo (ping) request id=0x0001, s
341	07:44:49.762519	0.002672	172.28.1.77	10.1.201.72	ICMP	74	Echo (ping) reply id=0x0001, s
- Packet Details:**
 - Frame 238: 74 bytes on wire (592 bits), 74 bytes captured
 - Ethernet II, Src: Cisco_ce:9e:02 (a0:b4:39:ce:9e:02), Destination: IntelCor_29:c9:4e (a0:51:0b:29:c9:4e)
 - Source: Cisco_ce:9e:02 (a0:b4:39:ce:9e:02)
 - Type: IPv4 (0x0800)
 - Internet Protocol Version 4, Src: 172.28.1.77, Dst: 10.1.201.72
 - Internet Control Message Protocol
- Packet Bytes:**
 - Ethernet II
 - Destination: a0:51:0b:29:c9:4e
 - Source: a0:b4:39:ce:9e:02
 - Type: IPv4
 - Internet Protocol Version 4
 - Version: 4
 - Header Len: 20
 - Differentiated Services Field: 0x0000
 - Total Length: 60d6f (48495)
 - Identification: 0xbd6f
 - Flags: 0x0000
 - Fragment Offset: 0
 - Time to Live: 60
 - Protocol: ICMP
 - Header Checksum: 0x409f0000

What is the Destination (MAC address only) of the Ethernet frame? _____

What is MAC address of your network interface? _____

Is the Destination of the Ethernet frame the same as your network interface? _____

➤ If you answered No, troubleshoot the issue.

Since this is the ICMP reply, the Destination address of the Ethernet frame should match the MAC address of your network interface.

Source field

Click on the Source field in the Packet Details.

The screenshot shows the Wireshark interface with a packet capture of ICMP Echo (ping) requests and replies. The packet list pane shows several packets, with packet 238 selected. The packet details pane shows the Ethernet II frame with Source: Cisco_ce:9e:02 (a0:b4:39:ce:9e:02) and Destination: IntelCor_29:c9:4e (a0:51:0b:29:c9:4e). The Internet Protocol Version 4 pane shows the source address 172.28.1.77 and destination address 10.1.201.72.

What is the Source (MAC address only) of the Ethernet frame? _____

What is MAC address of your network interface from Part 1? _____

Is the Source of the Ethernet frame the same as the Default Gateway?

➤ If you answered No, troubleshoot the issue.

Since this is an ICMP reply, the Source address of the Ethernet frame should match the MAC address of the Default Gateway. This shows that your network interface is sending the data.

Part 8: Summary

How many bits is a MAC address? _____

How many bytes is a MAC address? _____

Does the OSI Physical layer reference an address? _____

In the OSI Data-link layer, what types of addresses are used? _____

In detail, explain why the source address of the ICMP request is the destination of the ICMP reply? _____

In detail, explain why the destination address of the ICMP request is the source of the ICMP reply? _____
